


REVISION DATE
07-13-2001
02-26-2010


*.DGN FILE NAME
PM-8

WORD AND SYMBOL LAYOUT


40 ft TO 75 ft LANE LINE

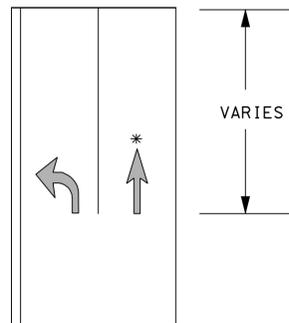


100 ft LANE LINE

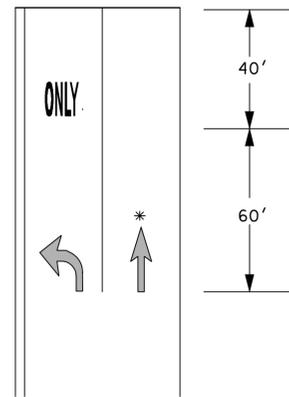


150 ft LANE LINE

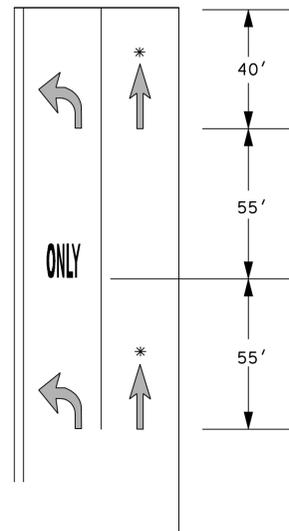


200 ft LANE LINE

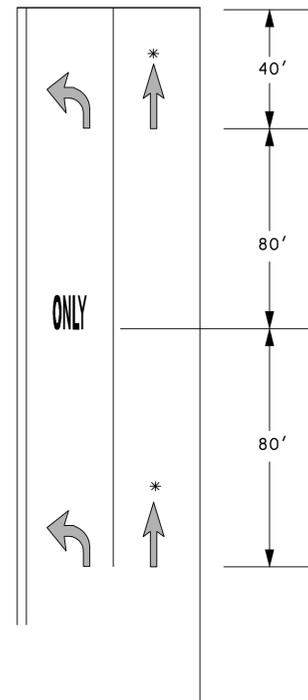

250 ft LANE LINE

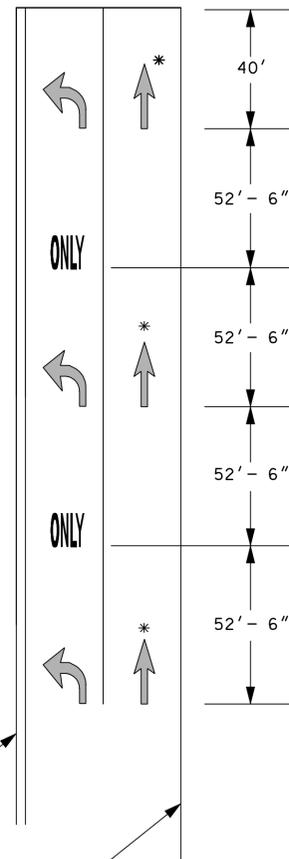

300 ft LANE LINE

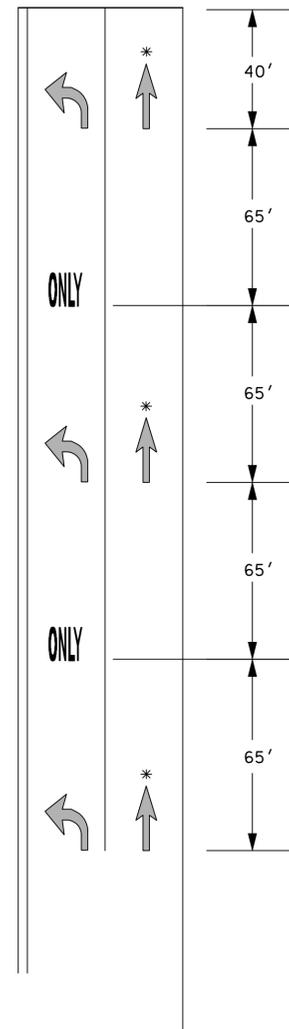

* SEE NOTE NO. 5

TYPICAL:
CENTERLINE OR ISLAND

TYPICAL:
LANE LINE, EDGELINE
OR CURB LINE.

GENERAL NOTES

1. WORDS AND SYMBOLS SHALL BE CENTERED LATERALLY WITHIN THE LANE. THE LONGITUDINAL DIMENSION SHALL BE PARALLEL TO THE LANE.
2. LONGITUDINAL SPACING BETWEEN SUCCESSIVE WORDS AND/OR SYMBOLS IN TURN LANES SHOULD BE AT LEAST 4 TIMES AND NO GREATER THAN 10 TIMES THE HEIGHT OF THE LARGEST CHARACTER.
3. THE STOP LINE MAY NOT BE PRESENT.
4. SEE WORDS AND SYMBOLS, PM-10A, FOR WORDS AND SYMBOL DETAILS.
5. STRAIGHT THROUGH ARROWS AS REQUIRED, SEE THE PAVEMENT MARKING PLANS FOR THE APPROPRIATE LAYOUT.
6. TO COMPLETE ARROW AND "ONLY" LAYOUT FOR LANE LENGTHS NOT SHOWN:
(LENGTH OF LANE LINE - 40') / NUMBER OF INCREMENTS.
7. WORDS, LANE LINES AND SYMBOLS SHALL BE THERMOPLASTIC (T).

STANDARD PLANS



PAVEMENT MARKING STANDARD

WORD AND SYMBOL LAYOUT