


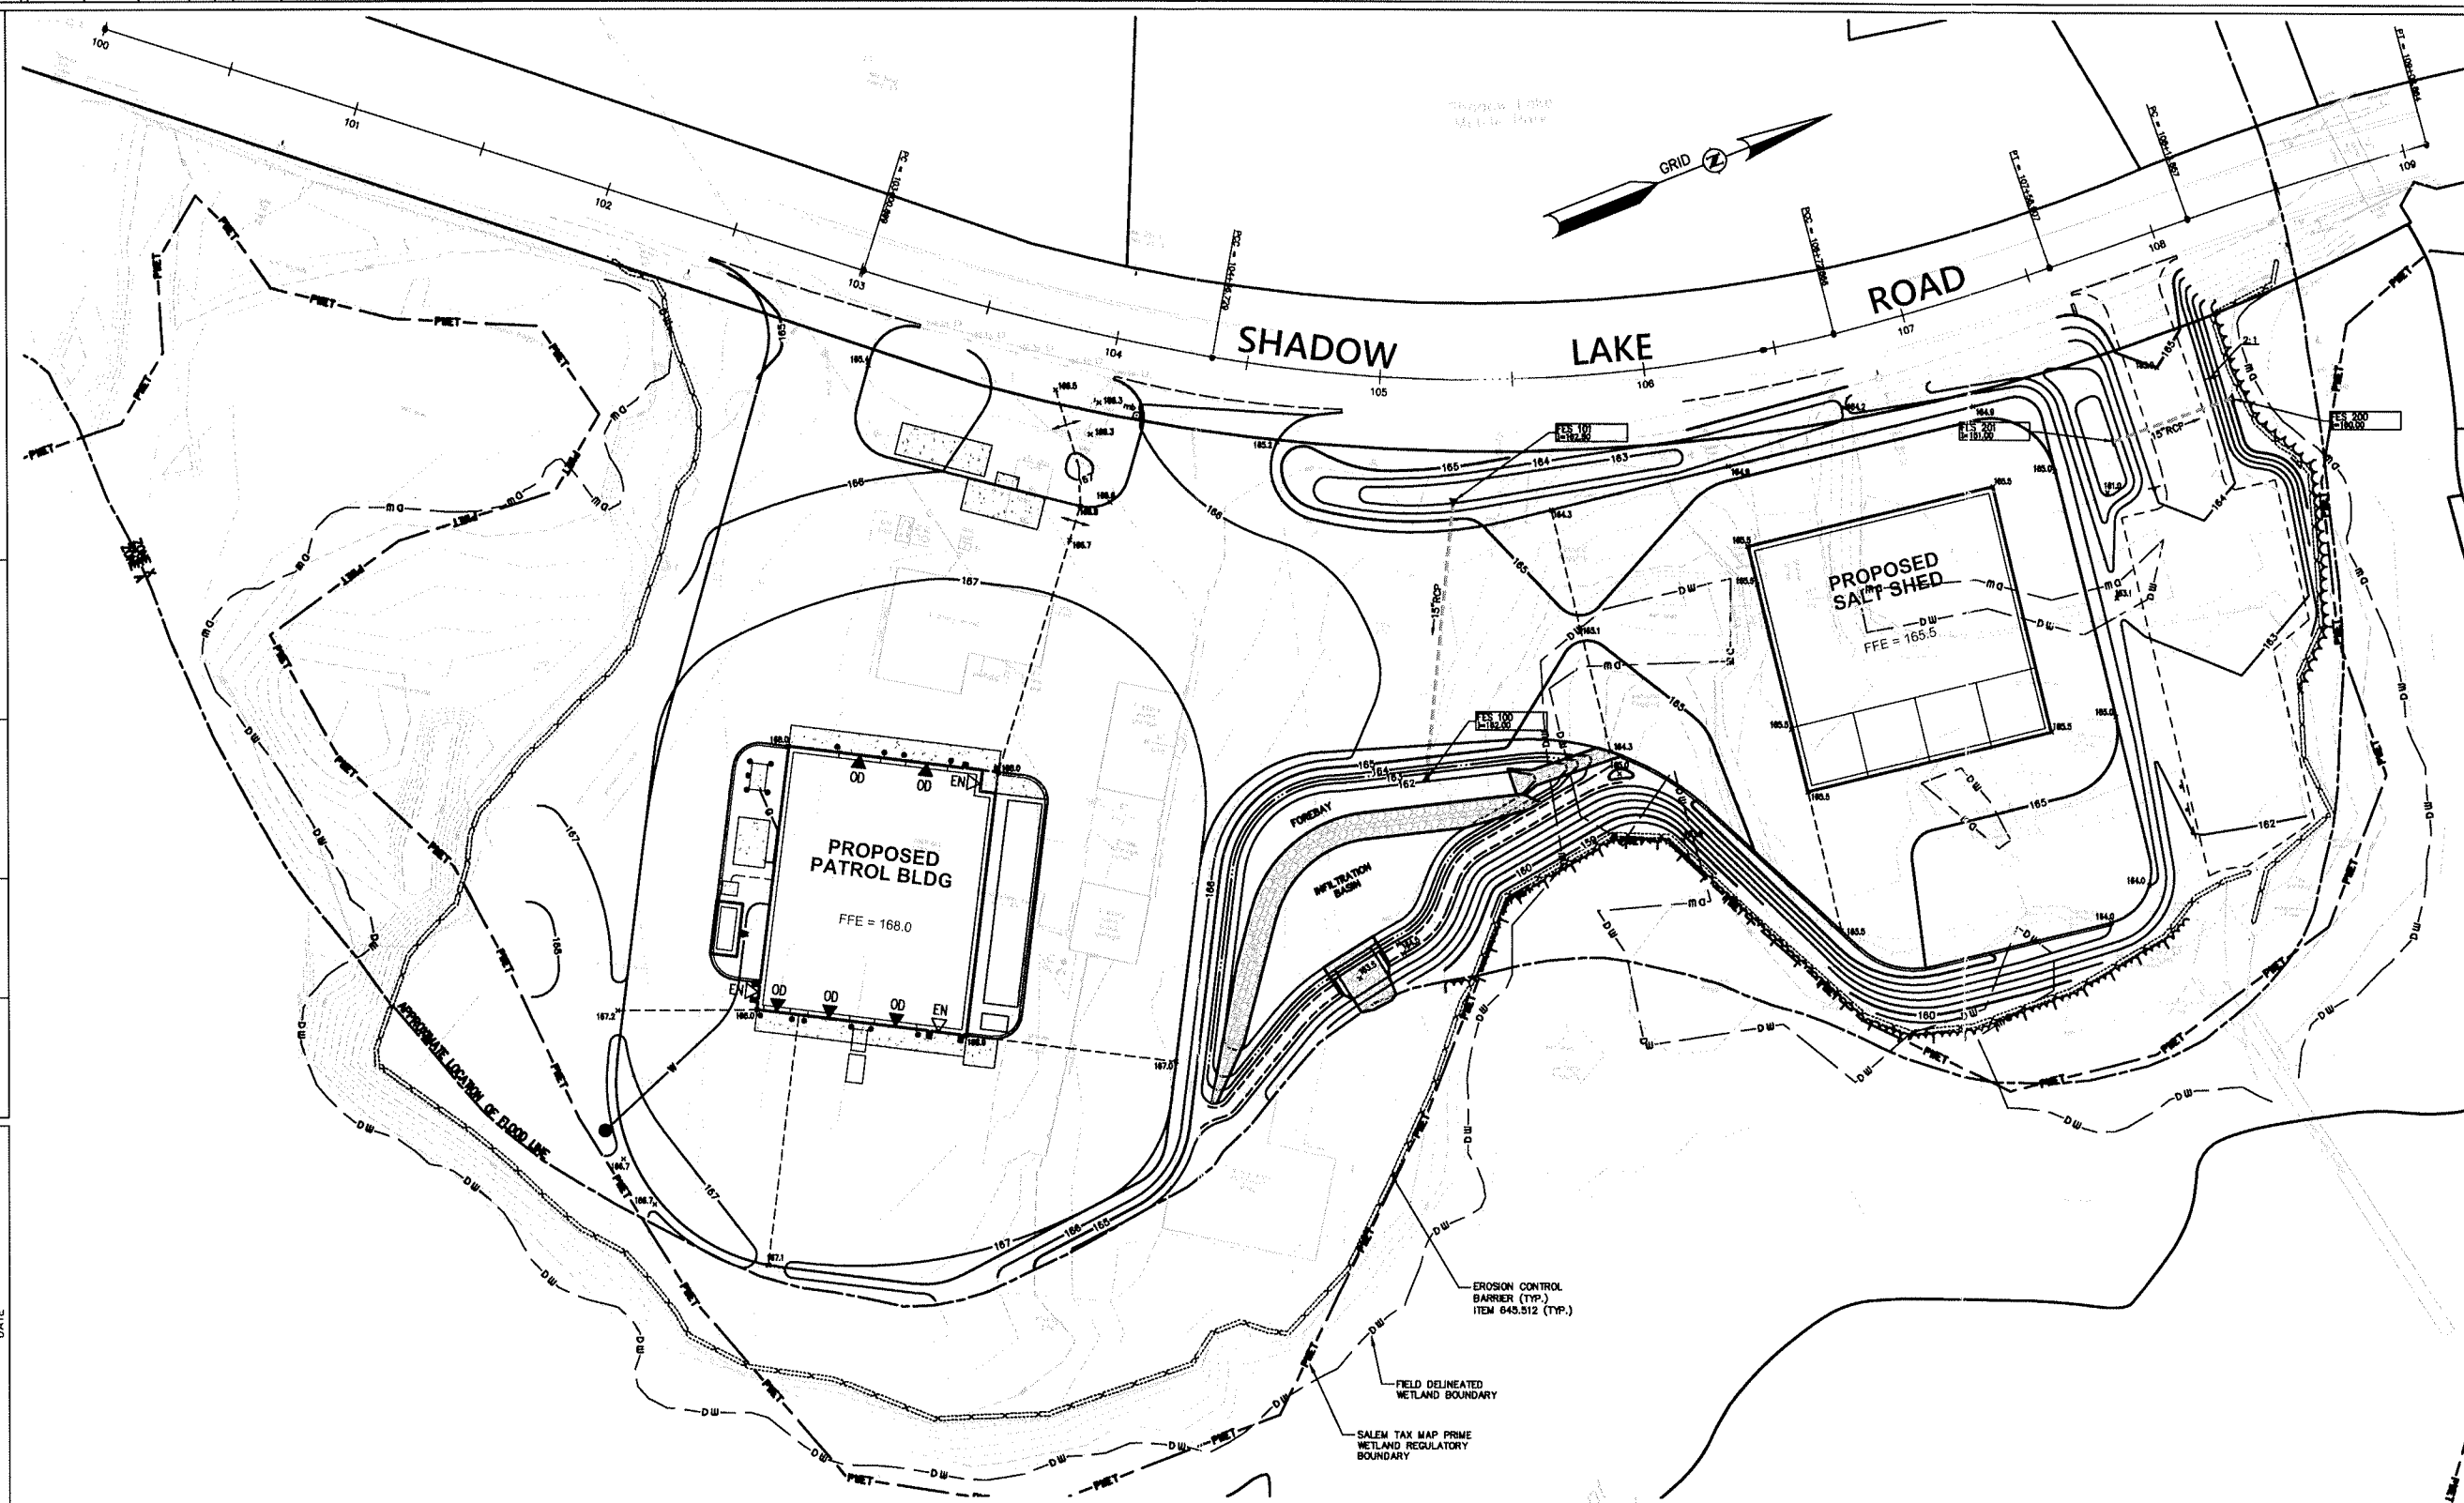





1. PROPERTY LINES SHOWN ON THIS PLAN ARE TAKEN FROM THE TOWN OF SALEM TAX MAPS.
2. THE EXISTING CONDITIONS SHOWN ON THIS PLAN HAVE BEEN PROVIDED BY THE NHDOT.
3. LOT 6493 LIES COMPLETELY WITHIN THE RURAL ZONE AS SHOWN ON THE TOWN OF SALEM ZONING MAP DATED APRIL 2008.
4. THE SITE LIES PARTIALLY WITHIN ZONE X (AREA OF 0.2% ANNUAL CHANCE FLOOD) AND ZONE A (AREA SUBJECT TO FLOODING BY THE 1% ANNUAL CHANCE FLOOD) AS SHOWN ON THE FLOOD INSURANCE RATE MAP FOR ROCKINGHAM COUNTY, NEW HAMPSHIRE, MAP NUMBER 33015300553E AND 33015300561E, EFFECTIVE DATE MAY 17, 2005.

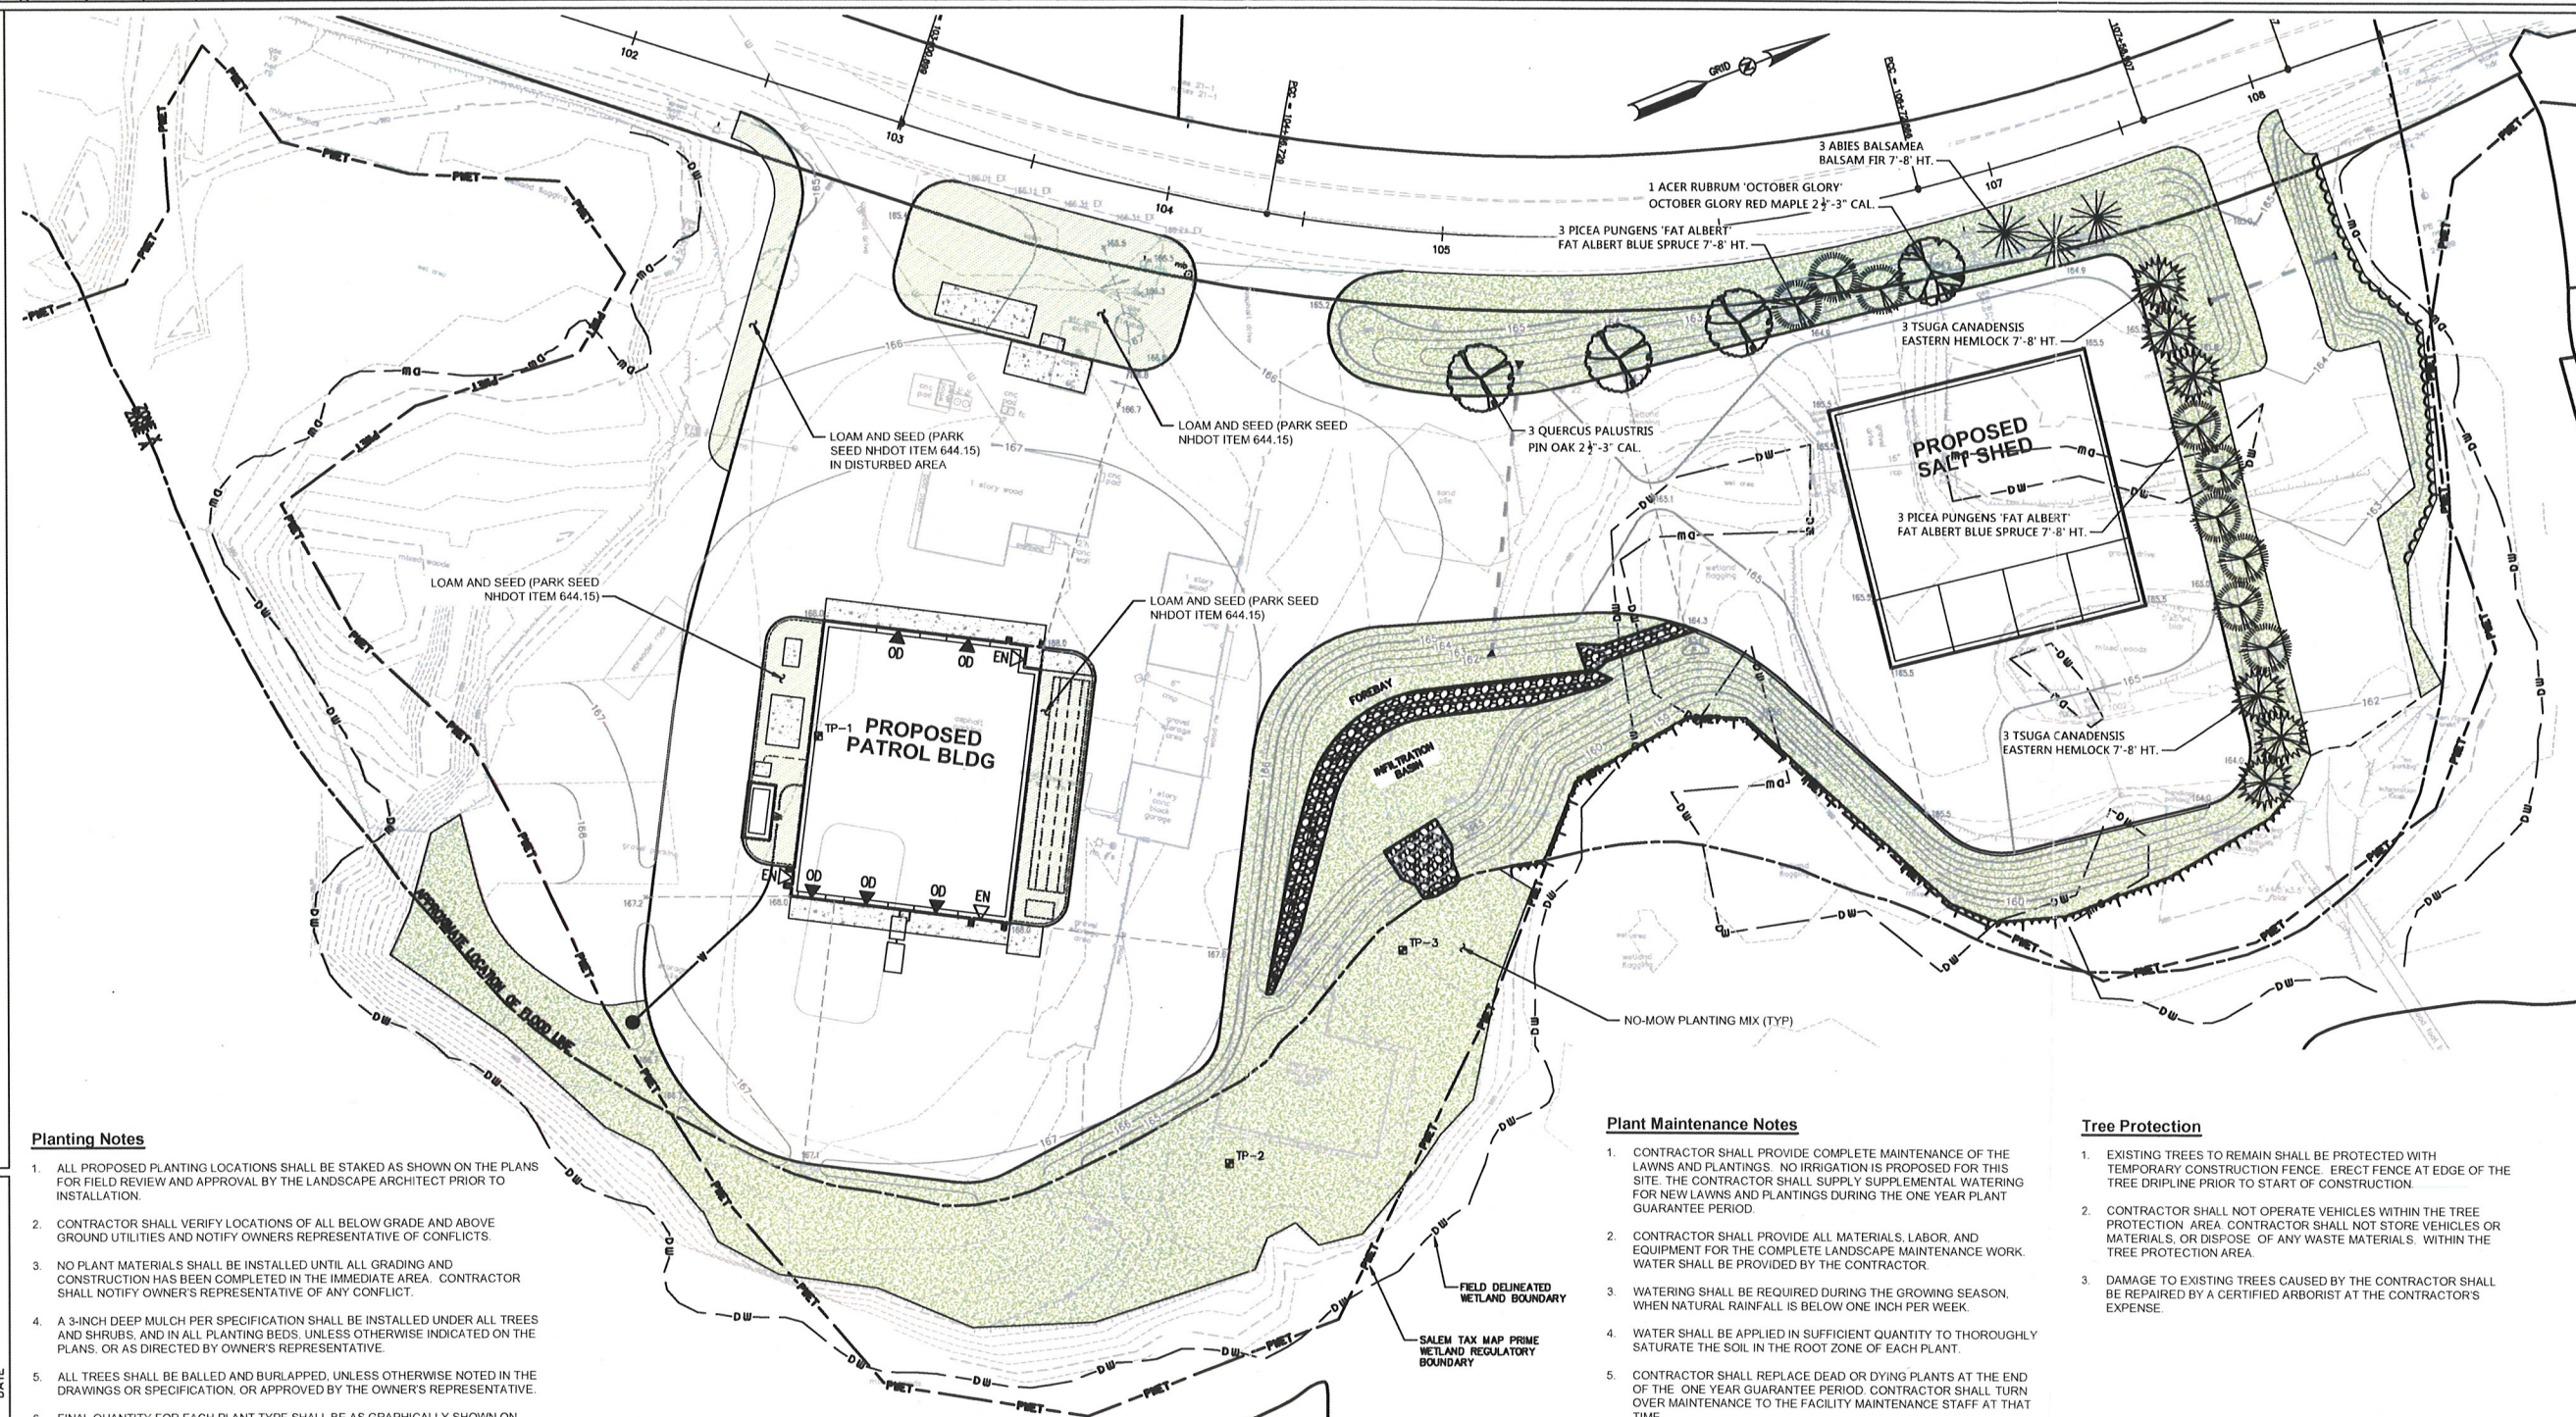


	2 Bedford Farms Drive Suite 200 Bedford, NH 03110 603.391.3900		STATE OF NEW HAMPSHIRE DEPARTMENT OF TRANSPORTATION    BUREAU OF PUBLIC WORKS			
			EXISTING CONDITIONS PLAN			
	DATE June 3, 2016	VHB PROJECT NO. 52174.02	DRAWING 52174.02-EC	STATE PROJECT NO. 80666R	SHEET NO. C-5	TOTAL SHEETS 10



 2 Bedford Farms Drive Suite 200 Bedford, NH 03110 603.391.3900	STATE OF NEW HAMPSHIRE				
	DEPARTMENT OF TRANSPORTATION		BUREAU OF PUBLIC WORKS		
	GRADING PLAN - MAINTENANCE FACILITY				
DATE	VHB PROJECT NO.	DRAWING	STATE PROJECT NO.	SHEET NO.	TOTAL SHEETS
June 3, 2016	52174.02	52174.02-GD	80666R	C-8	10





1. ALL PROPOSED PLANTING LOCATIONS SHALL BE STAKED AS SHOWN ON THE PLANS FOR FIELD REVIEW AND APPROVAL BY THE LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
2. CONTRACTOR SHALL VERIFY LOCATIONS OF ALL BELOW GRADE AND ABOVE GROUND UTILITIES AND NOTIFY OWNERS REPRESENTATIVE OF CONFLICTS.
3. NO PLANT MATERIALS SHALL BE INSTALLED UNTIL ALL GRADING AND CONSTRUCTION HAS BEEN COMPLETED IN THE IMMEDIATE AREA. CONTRACTOR SHALL NOTIFY OWNER'S REPRESENTATIVE OF ANY CONFLICT.
4. A 3-INCH DEEP MULCH PER SPECIFICATION SHALL BE INSTALLED UNDER ALL TREES AND SHRUBS, AND IN ALL PLANTING BEDS, UNLESS OTHERWISE INDICATED ON THE PLANS, OR AS DIRECTED BY OWNER'S REPRESENTATIVE.
5. ALL TREES SHALL BE BALLED AND BURLAPPED, UNLESS OTHERWISE NOTED IN THE DRAWINGS OR SPECIFICATION, OR APPROVED BY THE OWNER'S REPRESENTATIVE.
6. FINAL QUANTITY FOR EACH PLANT TYPE SHALL BE AS GRAPHICALLY SHOWN ON THE PLAN. THIS NUMBER SHALL TAKE PRECEDENCE IN CASE OF ANY DISCREPANCY BETWEEN QUANTITIES SHOWN ON THE PLANT LIST AND ON THE PLAN. THE CONTRACTOR SHALL REPORT ANY DISCREPANCIES BETWEEN THE NUMBER OF PLANTS SHOWN ON THE PLANT LIST AND PLANT LABELS PRIOR TO BIDDING.
7. ANY PROPOSED PLANT SUBSTITUTIONS MUST BE REVIEWED BY LANDSCAPE ARCHITECT AND APPROVED IN WRITING BY THE OWNER'S REPRESENTATIVE.
8. ALL PLANT MATERIALS INSTALLED SHALL MEET THE SPECIFICATIONS OF THE "AMERICAN STANDARDS FOR NURSERY STOCK" BY THE AMERICAN ASSOCIATION OF NURSERYMEN AND CONTRACT DOCUMENTS.
9. ALL PLANT MATERIALS SHALL BE GUARANTEED FOR ONE YEAR FOLLOWING DATE OF FINAL ACCEPTANCE.
10. AREAS DESIGNATED "LOAM & SEED" SHALL RECEIVE MINIMUM 6" OF LOAM AND SPECIFIED SEED MIX. LAWNS OVER 2:1 SLOPE SHALL BE PROTECTED WITH EROSION CONTROL FABRIC.
11. ALL DISTURBED AREAS NOT OTHERWISE NOTED ON CONTRACT DOCUMENTS SHALL BE LOAM AND SEEDED OR MULCHED AS DIRECTED BY OWNER'S REPRESENTATIVE.
12. THIS PLAN IS INTENDED FOR PLANTING PURPOSES. REFER TO SITE / CIVIL DRAWINGS FOR ALL OTHER SITE CONSTRUCTION INFORMATION.

1. CONTRACTOR SHALL PROVIDE COMPLETE MAINTENANCE OF THE LAWNS AND PLANTINGS. NO IRRIGATION IS PROPOSED FOR THIS SITE. THE CONTRACTOR SHALL SUPPLY SUPPLEMENTAL WATERING FOR NEW LAWNS AND PLANTINGS DURING THE ONE YEAR PLANT GUARANTEE PERIOD.
2. CONTRACTOR SHALL PROVIDE ALL MATERIALS, LABOR, AND EQUIPMENT FOR THE COMPLETE LANDSCAPE MAINTENANCE WORK. WATER SHALL BE PROVIDED BY THE CONTRACTOR.
3. WATERING SHALL BE REQUIRED DURING THE GROWING SEASON, WHEN NATURAL RAINFALL IS BELOW ONE INCH PER WEEK.
4. WATER SHALL BE APPLIED IN SUFFICIENT QUANTITY TO THOROUGHLY SATURATE THE SOIL IN THE ROOT ZONE OF EACH PLANT.
5. CONTRACTOR SHALL REPLACE DEAD OR DYING PLANTS AT THE END OF THE ONE YEAR GUARANTEE PERIOD. CONTRACTOR SHALL TURN OVER MAINTENANCE TO THE FACILITY MAINTENANCE STAFF AT THAT TIME.


1. EXISTING TREES TO REMAIN SHALL BE PROTECTED WITH TEMPORARY CONSTRUCTION FENCE. ERECT FENCE AT EDGE OF THE TREE DRIPLINE PRIOR TO START OF CONSTRUCTION
2. CONTRACTOR SHALL NOT OPERATE VEHICLES WITHIN THE TREE PROTECTION AREA. CONTRACTOR SHALL NOT STORE VEHICLES OR MATERIALS, OR DISPOSE OF ANY WASTE MATERIALS, WITHIN THE TREE PROTECTION AREA.
3. DAMAGE TO EXISTING TREES CAUSED BY THE CONTRACTOR SHALL BE REPAIRED BY A CERTIFIED ARBORIST AT THE CONTRACTOR'S EXPENSE.



Progress Print  
For Review Only  
6/03/2016




2 Bedford Farms Drive  
Suite 200  
Bedford, NH 03110  
603.391.3900

 <div>2 Bedford Farms Drive Suite 200 Bedford, NH 03110 603.391.3900</div>		STATE OF NEW HAMPSHIRE				
		DEPARTMENT OF TRANSPORTATION • BUREAU OF PUBLIC WORKS				
		PLANTING PLAN - MAINTENANCE FACILITY				
DATE	VHB PROJECT NO.	DRAWING	STATE PROJECT NO.	SHEET NO.	TOTAL SHEETS	
June 3, 2016	52174.02	52174.02-LA	80666R	C-9	10	





Progress Print  
For Review Only  
6/03/2016

 <div style="margin-left: 20px;"> 2 Bedford Farm Drive  Suite 200  Bedford, NH 03110  603.391.3900 </div>		STATE OF NEW HAMPSHIRE			
		DEPARTMENT OF TRANSPORTATION • BUREAU OF PUBLIC WORKS			
		WETLAND IMPACT PLAN - MAINTENANCE FACILITY			
DATE	VHB PROJECT NO.	DRAWING	STATE PROJECT NO.	SHEET NO.	TOTAL SHEETS
June 3, 2016	52174.02	52174.02-GRADING	80666R	C-10	10