
*.DGN FILE NAME PL-1B


TANDARD **METRIC PLANS**

> DEPARTMENT OF TRANSPORTATION, STATE OF NEW HAMPSHIRE CONCORD, N.H.




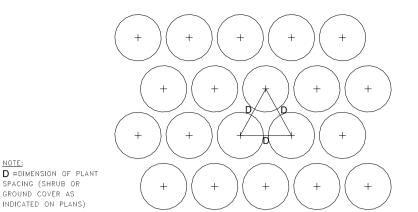


TYPICAL BED PLANT SPACING




GROUNDCOVER BED PLANTING

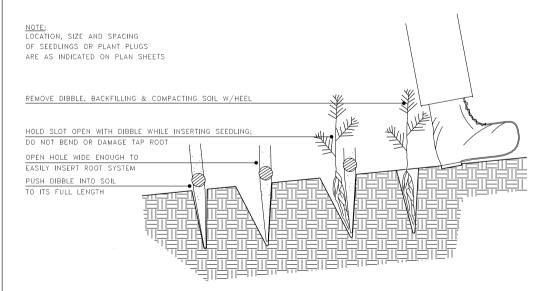

SEEDLINGS (EVERGREEN) OR WETLAND PLUG PLACEMENT

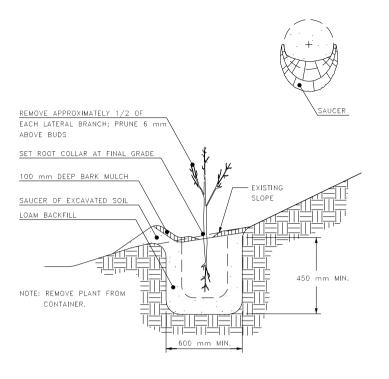

LINER PLANTING (DECIDUOUS)

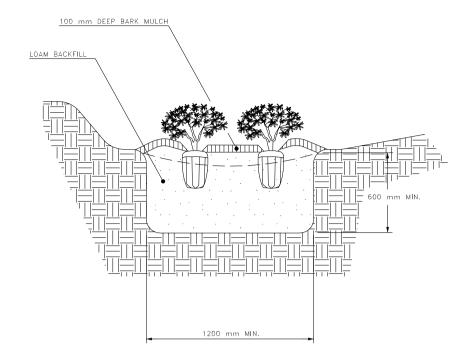


TRENCH NARROW MEDIAN PLANTING

3 HUB STAKES AND GUYS FOR -DECIDUOUS TREES OVER 100 mm CAL. AND EVERGREEN TREES OVER 2.7 m. (TWO UPHILL ON SLOPE)



STAKING AND GUYING PLAN SCHEMATIC

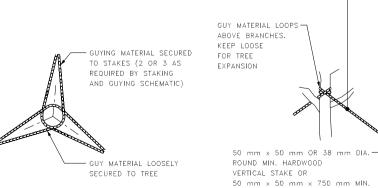

NOTE: PLASTIC CHAINLOCK (LANDSCAPE QUALITY AND SUITABLE STRENGTH FOR GUYING TREES) OR EQUIVALENT GUYING MATERIAL

GUYING DETAILS

TREE STAKING AND GUYING

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS OR METERS WHOLE NUMBERS INDICATE MILLIMETERS; DECIMAL

NUMBERS INDICATE METERS UNLESS OTHERWISE NOTED.

GUY MATERIAL SECURED -

HARDWOOD HUB STAKE

TO STAKES

- 1 REMOVE SUCKER SHOOTS AT BASE OF TREE.
- 2 MAKE CLEAN CUTS ON OLD STUBS, IF PRESENT.
- 3 REMOVE ENTIRE SUPPLY OF TWIGS AND BUDS ON TRUNK.
- 4 REMOVE LOWER BRANCH WHERE AN OVERLYING BRANCH OCCUPIES ABOUT THE SAME AREA.
- 5 SHAPE TREE BY REMOVING INJURED, DEAD AND MISSHAPED BRANCHES.
- 6 REMOVE CROSS BRANCHES AND THOSE DEVELOPING INTO SECONDARY LEADERS.

NOTE: BRANCHES IN DOTTED LINES INDICATE THOSE TO BE REMOVED.

TREE PRUNING

PLANTING STANDARD

PLANTING DETAILS

STANDARD

NO. PL-1B REVISION DATE

*.DGN FILE NAME PL-1B

PLANS

METRI **TANDARD**

STATE OF NEW HAMPSHIRE DEPARTMENT OF TRANSPORTATION, CONCORD, N.H.



2 OF