LEGEND

TYPE OF VETLAND IMPACT	PERMANENT IMPACT
N.H.W.B. (NON-VETLAND)	
N.H.W.B. & A.C.O.E. (VETLAND)	

N.H.W.B. - NEW HAMPSHIRE VETLANDS BOARD
A.C.O.E. - ARMY CORP. OF ENGINEERS

VETLAND DESIGNATION NUMBER

VETLAND IMPACT LOCATION

VETLAND MITIGATION AREA

TEMPORARY IMPACTS

MITIGATION

OH ORDINARY HIGH WATER

TOB TOP OF BANK

TBZ TIDAL BUFFER ZONE

TOBOHW TOP OF BANK & ORDINARY HIGH WATER

SHOWN SMALLER THAN ACTUAL SIZE

VETLAND DESIGNATION	USFWS VETLAND CLASSIFICATION	LOCATION	AREA (S.F.)		
			N.H.W.B. (NON-VETLAND)	N.H.W.B. & A.C.O.E. (VETLAND)	TEMPORARY IMPACTS
1	PEM1E	A		25	
2	PEM1E	B			200
		C			
		D			
		E			
		F			
		G			
		H			
		I			

PERMANENT IMPACTS: 25 S.F.
TEMPORARY IMPACTS: 200 S.F.

TOTAL IMPACTS: 225 S.F.

Minimum Expedited
M314-22, Gilford
40 scale
6/28/17
By D. Silvia

Work Description

District 3 forces will be widening NH Rte 11 without moving the toe of slope in order to allow weaving of traffic coming off of US Rte 3 bypass on the opposite side of Rte 11 from the widening work. This will require the installation of a new 4 feet drainage structure, pipe to the existing structure and removing the existing frame and grate from the existing structure and adding a manhole cover in order to continue the toe of slope over the top of the existing structure.

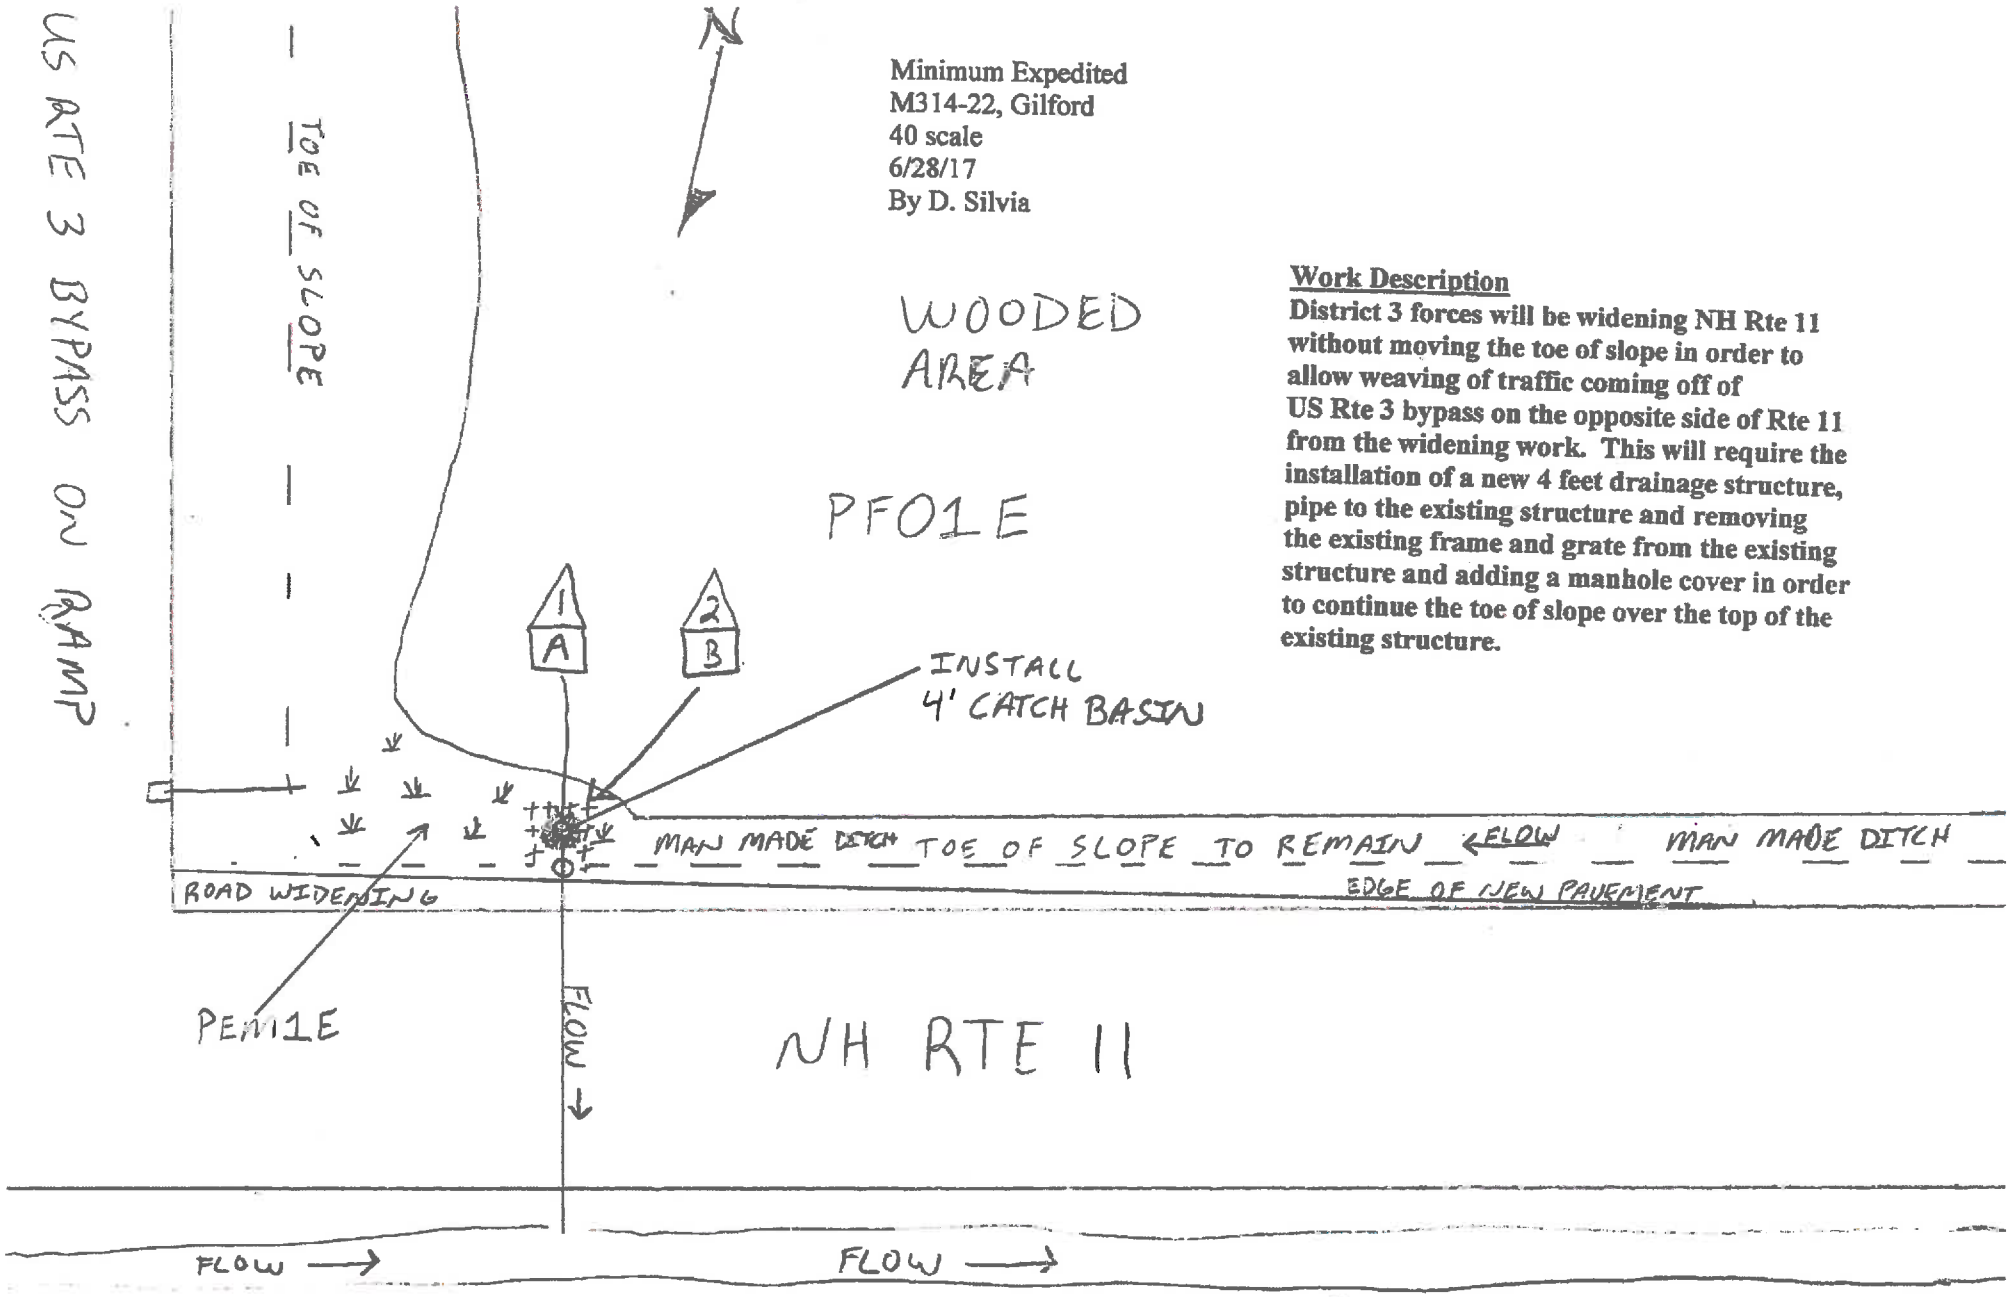

RSA 483-A:3 Excavating & Dredging Permit Exemptions

IV(b) Man-made nontidal ditches, roadside and railroad ditches ... may be maintained repaired, replaced, or modified as necessary to preserve their usefulness without a